


CORD

by panconnect•


CORD offers a smart solution for places where cables are needed but sockets are not. This panel replaces cable grommet and brings effective cable management to the meeting rooms, huddle rooms and workplaces. Installation is easy and quick, it fits to 100 mm holes.

CORD is produced in two variants - **CORD STANDARD** and **CORD POWER**. **CORD POWER** contains active **USB charging** (USB-A and 60 W USB-C) and two **PULL-OUT cables**. **CORD STANDARD** is ready for placing up to 4 cables. **PULL-OUT** sys-

tem is a preferred option for cable manipulation that works on a principle of gravity weighted cables in a textile bag and it allows the cable to be pulled up to 96 cm (the total length of the cable is 200 cm).



STANDARD

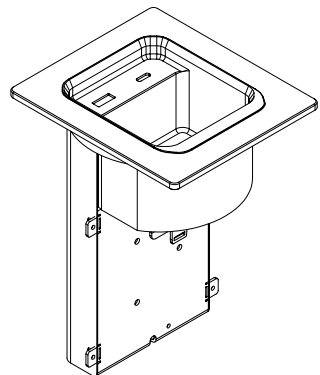

POWER


MODULAR

DIMENSIONS	WEIGHT	PULL-OUT CABLE SYSTEM	DIMENSIONS WITH PULL-OUT CABLE SYSTEM
110 × 126 × 74,5 mm	570 g	4	110 × 126 × 695 mm
110 × 126 × 168,5 mm	1190 g	2	110 × 126 × 695 mm


CORD

by panconnect•

STANDARD

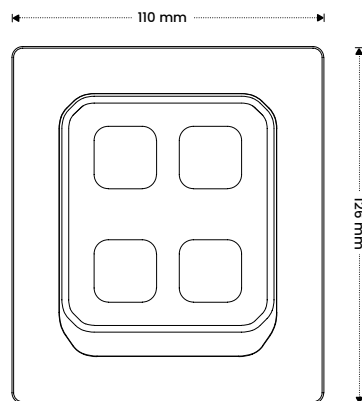

POWER

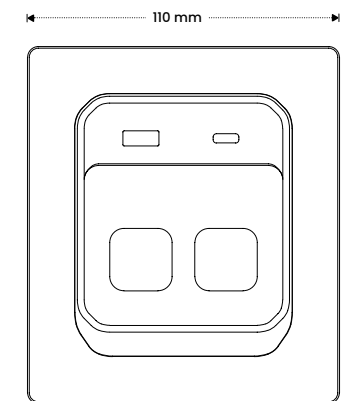

POWER CABLES

POWER PLUG



cable with standard plug type
a cable length **1,9 to 4,9m** -
not available for all standards

WIELAND GST18




25 cm long pigtail
cable with GST18i3
plug 2+PE wiring | 10A

WAGO miniWINSTA




25 cm long pigtail
cable with WINSTA mini plug
2+PE wiring | 10A

WHAT IS INCLUDED IN THE PACKAGE?

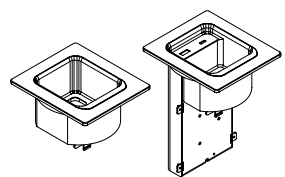


1 × panel CORD STANDARD / POWER
with chosen power cable



1 × montážní rámeček



2 × mounting screws in 6 possible sizes
(depending on the the desk mounting height)

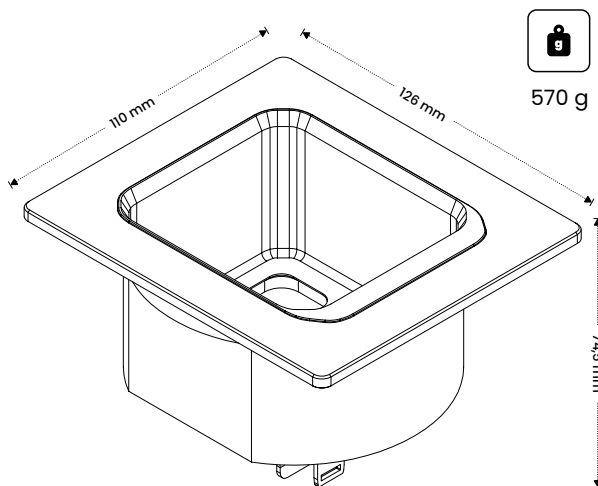

570 g

COLOURS




Onyx Black



Cotton White




Alu Silver

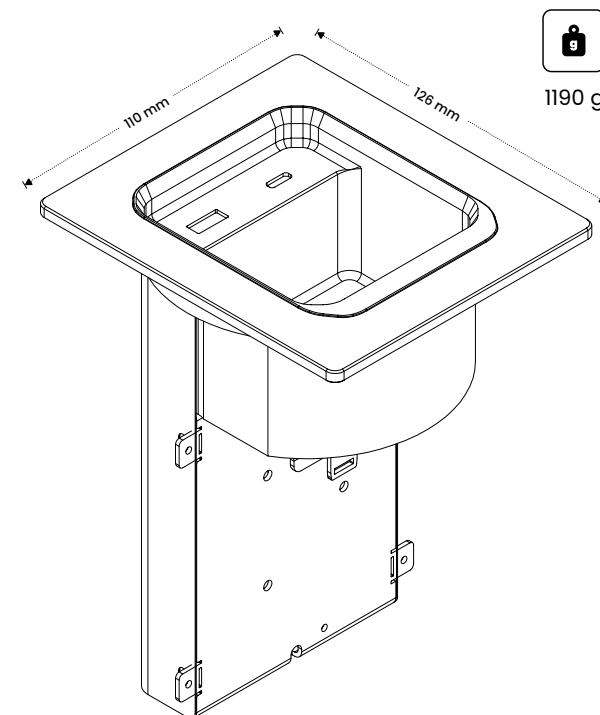

1190 g


PULL-OUT SYSTEM

by panconnect•

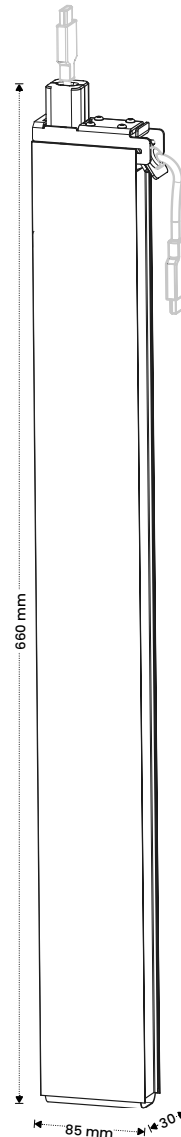


PULL-OUT - a mechanism that works on the principle of gravity weighted cables in a textile bag and it allows the cable to be pulled up to 96 cm (the total length of the cable is 200 cm).

WEIGHTS

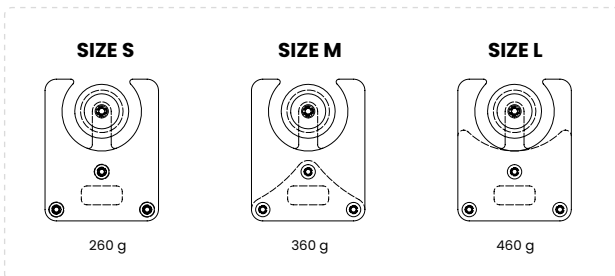


WHAT IS INCLUDED IN THE PACKAGE?

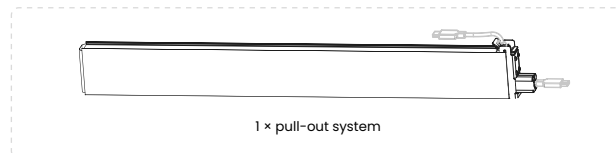


CABLES

USB-C 3.2 (M-M)




USB-C 3.2 gen 1
5Gbps | 200cm
gold and nickel plated
black pvc

USB-C 3.2 (M-F)




USB-C 3.2 gen 1
5Gbps | 200cm
gold and nickel plated
black pvc

USB-C (M) / HDMI (M)




HDMI2.0 | 4K60Hz
200cm
gold-plated
AWG32 / 22 | black pvc

mini DISPLAY PORT (M) / HDMI (M)




DP | 4K30Hz
200cm
4K/UHD/2160p@60Hz
black pvc

DISPLAY PORT (M-M)




DPI.4 | 8K60Hz
200cm
gold-plated
AWG32 / 22 | black pvc

DISPLAY PORT (M) / HDMI (M)




2K DP | WUXGA (1920x1200)
200cm
SECURE LOCK | gold-plated
AWG28 | black pvc

HDMI (M-M)




HDMI1.4 | 4K30Hz
200cm
gold-plated | AWG32 / 22
black pvc

HDMI (M-F)




HDMI1.4 | 4K30Hz
200cm
gold-plated | AWG32 / 22
black pvc

USB-A 3.0 (M-F)



USB3.0 | 5Gbps
200cm
9pin
AWG28/28 | black pvc

LAN (M-M)



CAT6 RJ45 | UTP
200cm
CU 4x2
AWG26/7 | black pvc

SAFETY & RECYCLATION



PANCONNECT declares that panel **CORD** complies with Low voltage directive 2014/35/EC and EMC directive 2014/30/EU. Testing has been made according to EN 50491-5-1:2010 and EN 50491-5-2:2010 standards.




All products from **PANCONNECT** are intended for **upgrade** or **recycling** in accordance with the company's policy.



Before the disposal of this panel comes up, please verify if this product can or cannot be upgraded or overhauled. If it's not possible, kindly arrange the disposal in accordance with valid EU directives. This product belongs to WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE) category so the disposal is possible only in accordance with this WEEE Directive 2012/19/EU. It cannot be part of the municipal waste.

For more information please check
www.asekol.cz | info@asekol.cz

INSTALLATION MANUAL

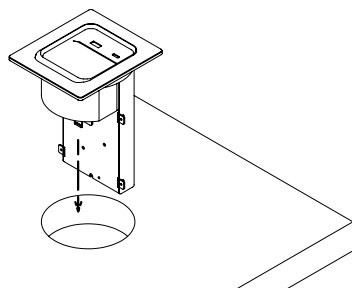

DESK MOUNTING HEIGHT
10 mm
up to 40 mm
(up to 60 mm with custom screws)

Tools: hole saw Ø 100 mm and screwdriver

- 01** Mark the centers and cut the holes with the hole saw
- 02** Put the panel into the cutout
- 03** Place the frame from the bottom part of the panel and tighten the screws
- 04** Clip on the PULL-OUT, plug it in and the panel is ready

USB-C SPECIFICATION

PowerDelivery up to 60W

USB-A SPECIFICATION

QuickCharge 3.0 up to 5A

SOCKETS

230V/10A (EU), 110V/10A (US)

INGRESS PROTECTION

IP22

POWER SUPPLY

110 - 250V, 10A

MODULARITY

PULL-OUT

MATERIALS

Dural | stainless steel | FENIX NTM | kortexin

DESIGNER

Dominik Hutečka