**FLAT** is a basic but very universal panel that can be placed on working places, conference tables, and in conference rooms. This product can be used practically everywhere where universal connectivity is needed. When there is a requirement for maximum modularity, low installation depth and easy installation, FLAT is the right choice. PAN-CONNECT offers 5 sizes of this product.

and connector modules (alternatively PULL-OUT cables). Three other sizes - FLAT M, L a XL can be used depending


on the connectivity requirements and number of sockets that are needed.


All the panels include USB - A and USB - C (60W) charging slots, alternatively Qi charging that is in-tegrated directly in the panel.

FLAT PLUS includes on top of that third party's active mo-FLAT LITE contains only sockets or combination of sockets dule (for size from 45 to 55 mm), typically a control compact system.

	DIMENSION	WEIGHT	MAX. NUMBER OF SOCKETS	MAX. NUMBER OF MODULES	POSSIBILITY OF QI WIRELESS CHARGING	ADAPTER FOR CONTROL SYSTEM	DIMENSION WITH PULL-OUT CABLE SYSTEM
LITE	227,5 × 73 × 81 mm	760 g	4	2	×	×	227,5 × 73 × 690 mm
M	227,5 × 73 × 81 mm	1150 g	2	1	<b>~</b>	×	227,5 × 73 × 690 mm
L	279 × 73 × 81 mm	1260 g	3	2	~	×	279 × 73 × 690 mm
Χι	330,5 × 73 × 81 mm	1370 g	4	3	~	×	330,5 × 73 × 690 mm
PLUS	360 × 73 × 81 mm	1740 g	3	2	~	BIAMP (NEETS) CUE	360 × 73 × 690 mm


LITE



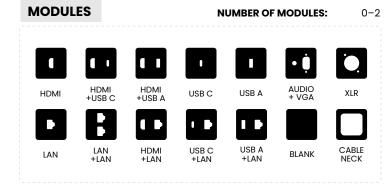




760 g

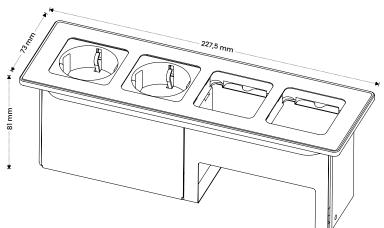




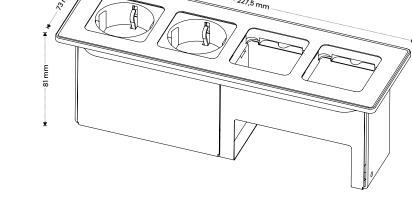


### **COLOURS**




### **POWER CABLES**




#### WHAT IS INCLUDED IN THE PACKAGE?




**SIZE M** 



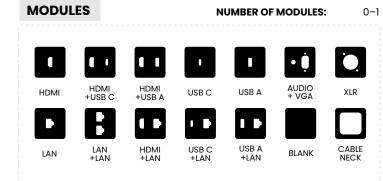




1150 g

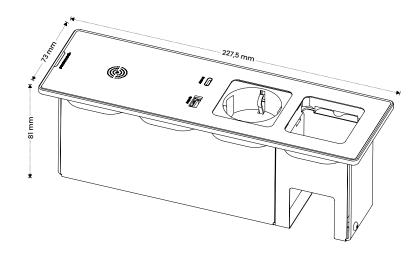


### **COLOURS**




Qi complaint 1.5A/5V **WIRELESS CHARGING** 




## **POWER CABLES**





## WHAT IS INCLUDED IN THE PACKAGE?



**SIZE L** 



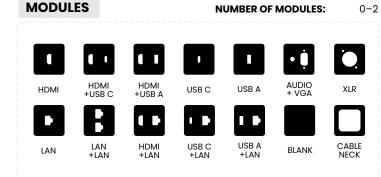

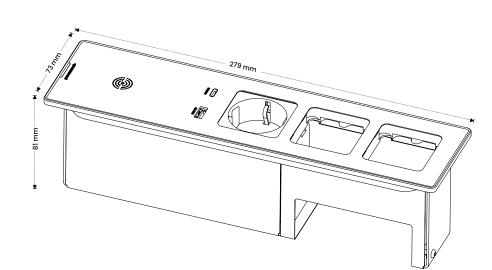




1260 g


### **COLOURS**




Qi complaint 1.5A/5V **WIRELESS CHARGING** 





## **POWER CABLES**






**SIZE XL** 




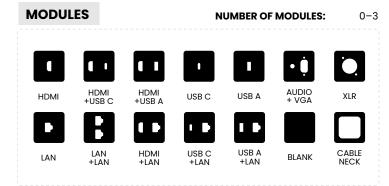

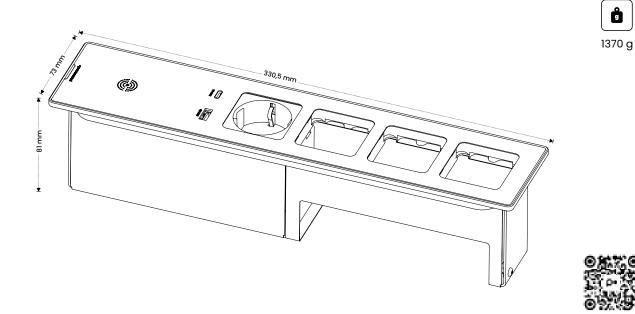


#### **COLOURS**






### **POWER CABLES**



#### WHAT IS INCLUDED IN THE PACKAGE?



## **PLUS**

## **CONTROL SYSTEM BIAMP**

NEETS

Ready for easy installation of standard 55 × 55 mm control system from Biamp/Neets (BraVo, OsCar, Echo, Sierra)

CUE 

Ready for installation of small wired 8-button keypad CUE-55 from CUE systems

## VLASTNÍ **INTEGRACE**

Other control system up to 55 × 55 mm size supported. For more information please contact your sales rep.

#### **COLOURS**



Onyx Black




Cotton White





Alu Silver


### **WIRELESS CHARGING**

Qi complaint 1.5A/5V






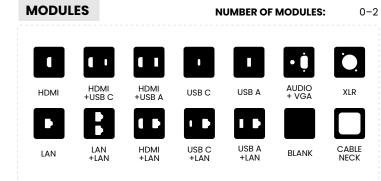


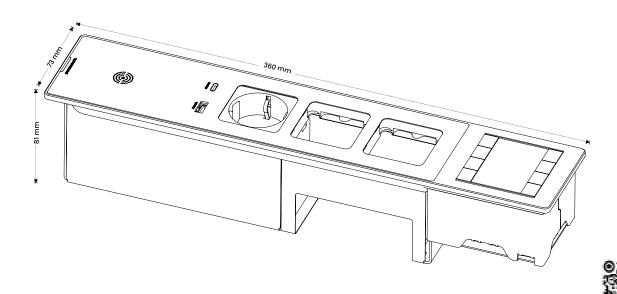

### **POWER CABLES**



### WHAT IS INCLUDED IN THE PACKAGE?



ĝ

1740 g

# **MODULES**

by panconnect.



#### **HDMI** HDMI2.0b F/F 4K 60HZ 150mm gold plated awg32/22 black pvc

DDC2 and EDID support

HD

150mm

black pvc

**AUDIO** F/F | 3,5mm jack 3 PIN 0,35mm 150mm goldplated black pvc

LAN

CAT 6A

360° shielded

Fully shielded

metal housing


USB-C 3.2

connection


coupler RJ45 | up to 500MHz,

10GBase-T | Gold-plated

15pin



HDMI2.0b F/F | 4K 60HZ awg32/22 black pvc



HDMI HDMI2.0b F/F | 4K 60HZ

USB-A 3.0

5Gbps | 135mm

AWG 28/28

black pvc

GEN 2


150mm | gold plated awg32/22 black pvc

#### USB-A 3.0 GEN 2

F/F 5Gbps | 135mm gold and nickel plated AWG 28/28 black pvc



M/F gold and nickel plated



#### USB-C 3.2 GEN 2

10Gbps 150mm black pvc

awg32/22

black pvc

pull-out

modul

connector

**CABLE NECK** 


LAN

CAT 6A coupler RJ45 | up to 500MHz, 10GBase-T | Gold-plated 360° shielded connection Fully shielded metal housing

> LAN CAT 6A


coupler RJ45 | up to 500MHz, 10GBase-T | Gold-plated 360° shielded

connection | Fully shielded | metal housing



#### **BLANK**

PRÁZDNÁ POZICE PRO PŘÍPADNÉ POZDĚJŠÍ POUŽITÍ



LAN CAT 6A coupler RJ45 | up to 500MHz, 10GBase-T | Gold-plated 360° shielded connection Fully shielded metal housing HDMI HDMI2.0b F/F | 4K 60HZ 150mm | gold plated




### 10Gbps | 150mm gold and nickel plated black pvc

GEN 2




suitable for up to IEC 320 C14



## **PASS - THRU**

thickness of the cable



#### LAN CAT 6A

XLR

25mm

nickled Black PLAW

LAN

CAT 6A

360° shielded

Fully shielded

metal housing

connection

coupler RJ45 | up to 500MHz,

10GBase-T | Gold-plated

XLR socket FEMALE

direct 3pin solder-on

coupler RJ45 | up to 500MHz, 10GBase-T | Gold-plated 360° shielded connection Fully shielded metal housing



5Gbps | 135mm gold and nickel plated AWG 28/28 | black pvc

Alue Silver

**COLOURS** 

Onyx Black

Cotton White


MODULAR


# PULL-OUT **SYSTEM**

by panconnect.


PULL-OUT - A mechanism that works on the principle of gravity weighted cables in a textile bag and it allows the cable to be pulled up to 96 cm (the total length of the cable is 200 cm).

### **WEIGHT**





### WHAT IS INCLUDED IN THE PACKAGE?



#### **CABLES**

#### NUMBER OF CABLES:

1-2

#### USB-C 3.2 (M-M)



USB-C 3.2 gen 1 5Gbps | 200cm gold and nickel plated black pvc

#### mini DISPLAY PORT (M) / HDMI (M)



DP I 4K30Hz 200cm 4K/UHD/2160p@60Hz black pvc

#### **HDMI** (M-M)




HDMI1.4 | 4K30Hz 200cm gold-plated | AWG32 / 22 black pvc



CAT6 RJ45 | UTP 200cm CU 4x2 AWG26/7 | black pvc





DP1.4 | 8K60Hz 200cm gold-plated



200cm gold-plated | AWG32 / 22

#### USB-C 3.2 (M-F)



USB-C 3.2 gen 1 5Gbps | 200cm gold and nickel plated black pvc

#### DISPLAY PORT (M-M)



AWG32 / 22 | black pvc

#### HDMI (M-F)




HDMI1.4 | 4K30Hz

#### USB-C (M) / HDMI (M)



HDMI2.0 | 4K60Hz 200cm gold-plated AWG32 / 22 | black pvc

#### DISPLAY PORT (M) / HDMI (M)



2K DP I WUXGA (1920x1200) 200cm SECURE LOCK | gold- plated AWG28 | black pvc

#### USB 3.0 (M-F)



USB3.0 | 5Gbps 200cm AWG28/28 | black pvc



# **SAFETY** & RECYCLATION



PANCONNECT declares that panel FLAT complies with Low voltage directive 2014/35/EC and EMC directive 2014/30/EU. Testing has been made according to EN 50491-5-1:2010 and EN 50491-5-2:2010 standards.



All products from PANCONNECT are intended for upgrade or recyclation in accordance with the company's policy.




Before the disposal of this panel comes up, please verify if this product can or cannot be upgraded or overhauled. If it's not possible, kindly arrange the disposal in accordance with valid EU directives. This product belongs to WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE) category so the disposal is possible only in accordance with this WEEE Directive 2012/19/EU. It cannot be part of the municipal waste.

For more information please check www.asekol.cz | info@asekol.cz

USB-C SPECIFICATION	PowerDelivery up to 60W				
USB-A SPECIFICATION	QuickCharge 3.0 up to 5A				
SOCKETS	230V/10A (EU), 110V/10A (US)				
INGRESS PROTECTION	IP22				
POWER SUPPLY	110 - 250V, 10A				
MODULARITY	MODULES   PASS-THRU   PULL-OUT				
MATERIALS	Dural   stainless steel   FENIX NTM   kortexin				
DESIGNER	Dominik Hutečka				

# INSTALLATION MANUAL





#### Tools: jig saw, drill and bit Ø 10mm

01| Mark 4 holes according to the cutout and drill them with the bit

02| Take a jig saw and cut the holes

**03|** Put the panel to the hole and place the metal frame over the bottom part of the panel and tighten the screws

04| If you've chosen PULL-OUT system for your panel, add it now

**Designed & manufactured in Brno, Czech Republic.**PANCONNECT s.r.o. | Olomoucká 51, Brno | Czech Republic www.panconnect.eu | support@panconnect.eu

panconnect.