

FLOPIQ

by panconnect•

FLOPIQ offers effective cable management in a small version. Main attributes are easy installation, fully metal robust chassis and wide range of usage. There are 4 variants of panel FLOPIQ available in Black or White colour.


FLOPIQ XS is a great option for your workplace. Two cables and one cable pass-thru bring effective cable management.

FLOPIQ S is ready for 4 cables based on your needs.


FLOPIQ M includes integrated USB-C/A charging and 2

slots for PULL-OUT cables.


FLOPIQ L provides a full connectivity in a compact way. Socket, 2 PULL-OUT cables and powerful USB-C/A charging at one place.




XS



S



M



L

DIMENSION

WEIGHT

MAX.
NUMBER OF
SOCKETS

PULL-OUT
CABLE SYSTEM

DIMENSION
WITH PULL-OUT
CABLE SYSTEM

110 × 110 × 48 mm

410 g

0

✓

110 × 110 × 692 mm

110 × 110 × 48 mm

390 g

0

✓

110 × 110 × 698 mm

110 × 110 × 84 mm

830 g

0

✓

110 × 110 × 698 mm

128 × 128 × 84 mm

990 g

1

✓

128 × 128 × 692 mm

FLOPIQ

by panconnect•

XS

COLOURS



Black



White

PULL-OUT CABLES

NUMBER OF CABLES:

2



USB-C



LAN



HDMI





LIGHTNING



USB-A



410 g

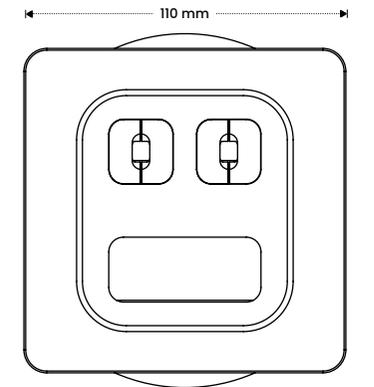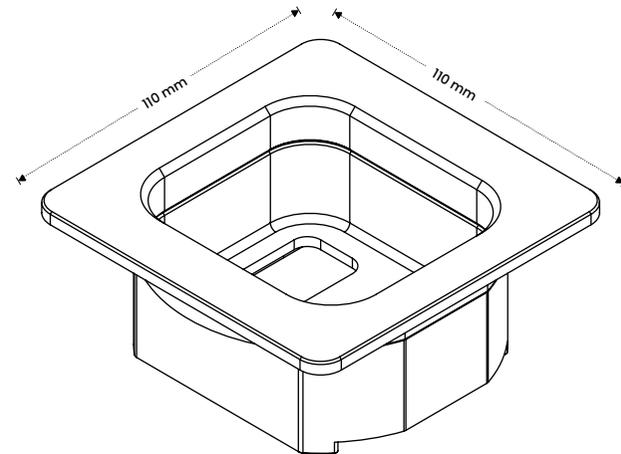

POWER CABLES

POWER PLUG



cable with standard plug type a
cable length 1,9 to 4,9m)
not available for all standards

WAGO miniWINSTA




25 cm long pigtail
cable with WINSTA mini plug
2+PE wiring | 10A

WIELAND GST18




25 cm long pigtail
cable with GST18i3 plug
2+PE wiring | 10A

WHAT IS INCLUDED IN THE PACKAGE?



1 × panel with chosen
power cables



1 × mounting frame



2 × mounting screws in 6 possible sizes (de-
pending on the the desk mounting height)

FLOPIQ

by panconnect•

S

COLOURS



Black



White

PULL-OUT CABLES

NUMBER OF CABLES:

4



USB-C



LAN



HDMI





LIGHTNING



USB-A



390 g

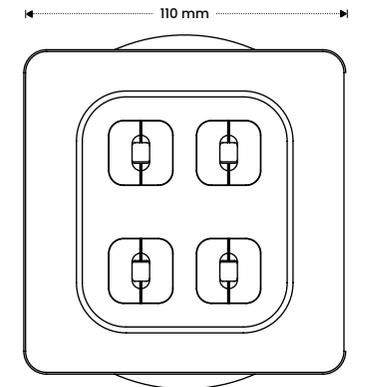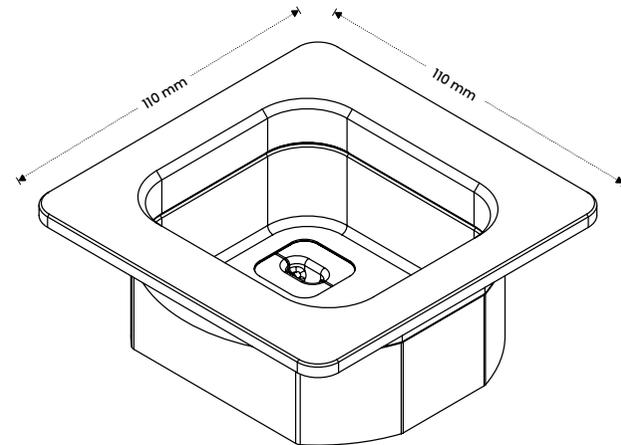

POWER CABLES

POWER
PLUG



cable with standard plug type a
cable length 1,9 to 4,9m)
not available for all standards

WAGO
miniWINSTA




25 cm long pigtail
cable with WINSTA mini plug
2+PE wiring | 10A

WIELAND
GST18




25 cm long pigtail
cable with GST18i3 plug
2+PE wiring | 10A

WHAT IS INCLUDED IN THE PACKAGE?



1 × panel with chosen
power cables



1 × mounting frame



2 × mounting screws in 6 possible sizes (de-
pending on the the desk mounting height)

FLOPIQ

by panconnect•

M

COLOURS




Black




White


COMBINATION OF PULL-OUT CABLES




HDMI USB-A




HDMI USB-C



HDMI LAN





LIGHTNING USB-C



LAN USB-C



830 g

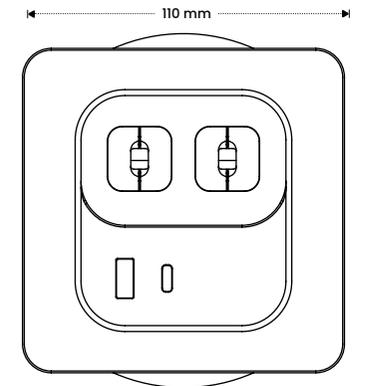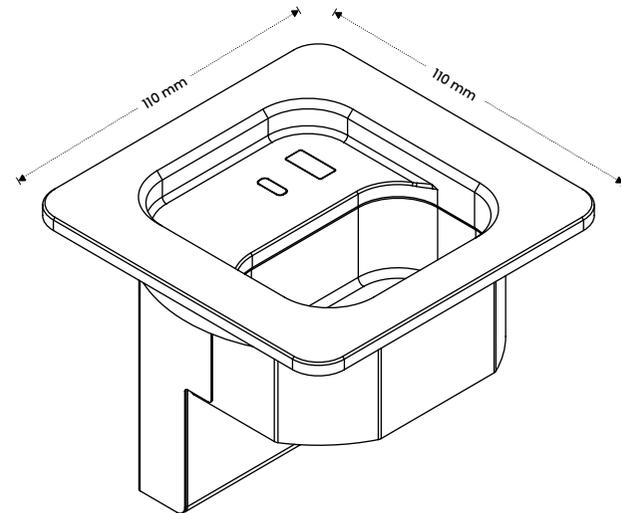

POWER CABLES

POWER PLUG



cable with standard plug type a
cable length 1,9 to 4,9m)
not available for all standards

WAGO miniWINSTA




25 cm long pigtail
cable with WINSTA mini plug
2+PE wiring | 10A

WIELAND GST18




25 cm long pigtail
cable with GST18i3 plug
2+PE wiring | 10A

WHAT IS INCLUDED IN THE PACKAGE?



1 × panel with chosen
power cables




1 × mounting frame



2 × mounting screws in 6 possible sizes (de-
pending on the the desk mounting height)

FLOPIQ

by panconnect•

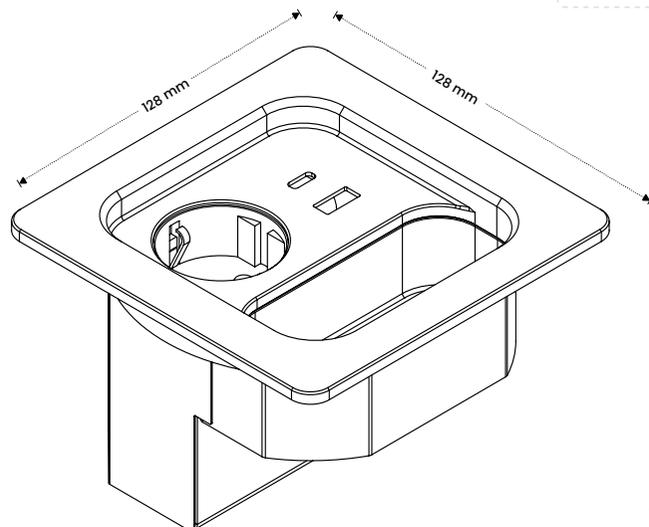

COLOURS




Black




White


COMBINATION OF PULL-OUT CABLES




HDMI USB-A




HDMI USB-C



HDMI LAN




LIGHTNING USB-C



LAN USB-C



990 g

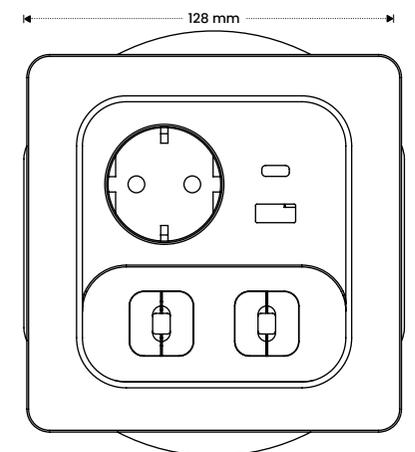

SOCKETS

NUMBER OF SOCKETS:

1



FR



SC



DK



IT



US



UK



UN



CH

POWER CABLES

POWER PLUG



cable with standard plug type a
cable length 1,9 to 4,9m)
not available for all standards

WAGO miniWINSTA




25 cm long pigtail
cable with WINSTA mini plug
2+PE wiring | 10A

WIELAND GST18




25 cm long pigtail
cable with GST18i3 plug
2+PE wiring | 10A

WHAT IS INCLUDED IN THE PACKAGE?



1 × panel with chosen power cables



1 × mounting frame




2 × mounting screws in 6 possible sizes (depending on the the desk mounting height)

PULL-OUT SYSTEM


by panconnect•

PULL-OUT - A mechanism that works on the principle of gravity weighted cables in a textile bag and it allows the cable to be pulled up to 96 cm (the total length of the cable is 200 cm).

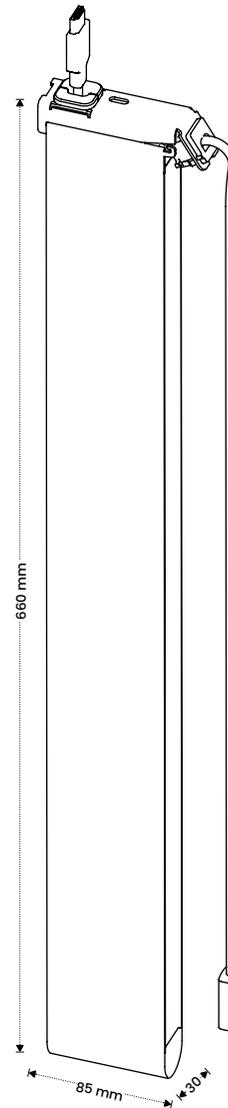


CABLES

HDMI (M-M)




HDMI1.4 | 4K30Hz
200cm
gold-plated | AWG32 / 22
black pvc

HDMI (M-F)




HDMI1.4 | 4K30Hz
200cm
gold-plated | AWG32 / 22
black pvc

USB-A 3.0 (M-F)




USB3.0 | 5Gbps
200cm
9pin
AWG28/28 | black pvc

LAN (M-M)




CAT6 RJ45 | UTP
200cm
CU 4x2
AWG26/7 | black pvc

USB-C 2.0 (M) / LIGHTNING (M)




200cm
nickel-alu plated
black pvc

USB-A 2.0 (M) / LIGHTNING



200cm
nickel-alu plated
black pvc


USB-C 3.2 (M-M)



USB-C 3.2 gen 1
5Gbps | 200cm
gold and nickel plated
black pvc


WEIGHT

SIZE S




260 g

SIZE M




360 g

SIZE L



460 g

WHAT IS INCLUDED IN THE PACKAGE?



1 x pull-out system

SAFETY & RECYCLATION



PANCONNECT declares that panel FLOPIQ complies with Low voltage directive 2014/35/EC and EMC directive 2014/30/EU. Testing has been made according to EN 50491-5-1:2010 and EN 50491-5-2:2010 standards.



All products from PANCONNECT are intended for upgrade or recycling in accordance with the company's policy.



Before the disposal of this panel comes up, please verify if this product can or cannot be upgraded or overhauled. If it's not possible, kindly arrange the disposal in accordance with valid EU directives. This product belongs to WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE) category so the disposal is possible only in accordance with this WEEE Directive 2012/19/EU. It cannot be part of the municipal waste. For more information please check www.asekol.cz | info@asekol.cz

INSTALLATION MANUAL



Easy installation



DESK MOUNTING HEIGHT
10 mm
to 40 mm
(up to 60mm with custom screws)

Tools: hole saw Ø 100 mm (in case of FLOPIQ L Ø 120 mm) and screwdriver

- 01| Mark the centers and cut the hole with the hole saw
- 02| Put the panel to the hole
- 03| Place the frame from the bottom part of the panel and tighten the screws
- 04| Clip on the PULL-OUT, plug it in and the panel is ready

USB-C SPECIFICATION

PowerDelivery up to 60W

USB-A SPECIFICATION

QuickCharge 3.0 up to 5A

SOCKETS

230V/10A (EU), 110V/10A (US)

INGRESS PROTECTION

IP22

POWER SUPPLY

110 - 250V, 10A

MODULARITY

PULL-OUT

MATERIALS

Dural | steel | kortexin

DESIGNER

Dominik Hutečka

Designed & manufactured in Brno, Czech Republic.
PANCONNECT s.r.o. | Olomoucká 51, Brno | Czech Republic
www.panconnect.eu | support@panconnect.eu

panconnect